POI-2002 Version: 2

PoE Injektor

Der LevelOne POI-2002 ist ein PoE-Injektor (PSE) mit einem Ethernet-Eingansport (nur Daten) und einem Ausgangsport (Daten+Strom), der für kleine bis mittlere Netzwerke entwickelt worden ist. Dieser Injektor wandelt die 100~240V/AC Stromversorgung in Niederspannung um, damit IEEE 802.3af kompatible Geräte über die Ethernet-Verkabelung versorgt werden können. Darüber hinaus kann der POI-2002 Injektor prüfen, ob das Netzwerkgerät mit IEEE 802.af konform ist oder nur mit Daten versorgt werden kann. Durch hinzufügen eines PoE-Splitter (POS-1002) in bestehende nicht-PoE Netzwerke, können weitere Netzwerkprodukte wie Access Points und IPKameras problemlos eingesetzt werden. Somit wird Administratoren eine flexible Installation ermöglicht, da die neuen Geräte nicht in der Nähe einer Steckdose platziert werden müssen.

1. PoE LED Indicators
2. RJ-45 Output Port
3. RJ-45 Input Port
4. Interlocking Feature
5. Power Socket
6. Interlocking Feature
7. Wall-Mountable

Key-features

- Minimieren Sie die Notwendigkeit für ein sperriges Netzteil oder Stromleitung
- Liefert Strom und Daten über ein einziges Ethernet-Kabel
- Internes Netzteil
- Hohe Sicherheit durch Überspannungsschutz
- Stromversorgung bis zu 100m
- Plug-and-Play, leichte und kompakte Bauweise
- Einzigartige Verriegelungsfunktion für eine einfache Installation

Specifications

System Specifications

Standards & Protocols:
IEEE 802.3 10Base-T, Ethernet
IEEE 802.3u 100Base-TX, Fast Ethernet
IEEE 802.3af Power over Ethernet (PoE)

Connectors and Cabling:
1 x 10/100Base-TX RJ-45 Input Port
1 x 10/100Base-TX RJ-45 PoE Output Port

Indikator:
Power, PoE

Pin Assignment and Polarity:
4/5 (+), 7/8 (-)

Power:
PoE Power Output: DC 52V / 15.4W
Unit Output Voltage: DC 52V / 0.3A
Power Requirement: 100-240V AC, 50/60Hz, 0.8A
Power Consumption: 15.4W (Max.)

Environment

Temperatur (°C):
Operating: 0°C ~ 45°C
Storage: 0°C ~ 70°C

Luftfeuchtigkeit (nicht kondensierend):
Storage: 5% to 95%
Operating: 5 ~ 95%

Physical Specifications

Abmessungen (W x D x H mm):
87.9 x 51.3 x 166mm

Gewicht:
350g

Others

Zertifizierung:
FCC Part 15, CE, RoHS

Deployment:
Wall mount

Diagramm

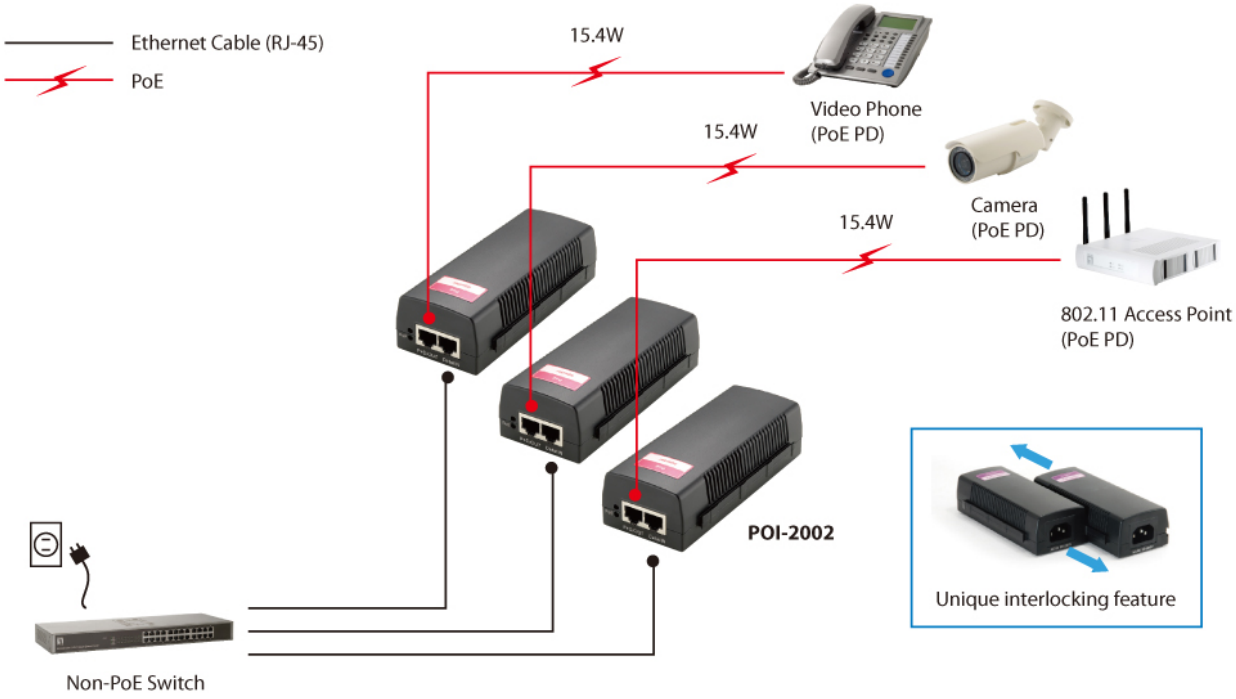

Order Information

POI-2002

Package Contents

POI-2002

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.